



HAL
open science

Hydrothermal process development for the treatment of asbestos containing waste

Christ Terence Nzogo Metoule, Stéphane Delaby, Jean-Henry Ferrasse, Olivier Boutin

► **To cite this version:**

Christ Terence Nzogo Metoule, Stéphane Delaby, Jean-Henry Ferrasse, Olivier Boutin. Hydrothermal process development for the treatment of asbestos containing waste. NAXSOS 2018, 6th International Conference on Sustainable Solid Waste Management, Jun 2018, Naxsos island, Greece. hal-02116857

HAL Id: hal-02116857

<https://amu.hal.science/hal-02116857>

Submitted on 1 May 2019

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Hydrothermal process development for the treatment of asbestos containing waste

C.T. Nzogo Metoule¹, S. Delaby¹, J.H. Ferrasse², O. Boutin²

¹ CSTB, Comfort Health Direction, Aero-contaminants and biological agents division, Grenoble, France

² Aix Marseille Univ, CNRS, Centrale Marseille, M2P2, Marseille, France

Keywords: Asbestos, Asbestos containing waste, Hydrothermal Process, Supercritical water, Chrysotile.

Presenting author email: olivier.boutin@univ-amu.fr

In France, the maximum industrial production of asbestos was 150 000t.year⁻¹ between 1973 and 1975. In France, there are currently two types of waste management for waste containing asbestos: landfilling and vitrification by plasma torch. With the storage of thousand tons waste by year, most sites will be soon saturated. Despite its performance, the vitrification process is energetically expensive.

Nowadays hydrothermal process is a mature technology used for the treatment of organics wastes, for instance by wet air oxidation. However, its application for mineral waste treatment is not developed, because technical difficulties. Ball and Taylor (1961) realised the first study on chrysotile denaturation by hydrothermal process. Sigon *et al* (2006) claimed a patent for degradation of asbestos in non-hazardous material by using supercritical water as only reagent. Finally, Anastasiadou *et al* (2010) established the hydrothermal conversion of chrysotile into forsterite in supercritical condition (temperature 700°C and pressure 2.4MPa) during 1h. Due to the presence of the mineral phase, it is necessary to reach high temperature. The objective is either to degradate the organic phase (glue for instance) and to change the morphologic form as well as the crystalline phase of asbestos. An example is given in equation 1 for chrysolite.



The aims of this work is to experimentally treat asbestos containing waste. First, an experimental assessment method is developed to qualify the performance of hydrothermal process. Then, a parametrical study is realized to determine influence of temperature, pressure, treatment duration, concentration and variety of asbestos (Table 2).



Figure 1. Experimental apparatus

The result obtained show a total degradation of chrysotile, crocidolite varieties, and fibrocement (containing chrysotile), under these hydrothermal conditions: $T \geq 720^\circ\text{C}$, $P \geq 25 \text{ MPa}$, $t \geq 1 \text{ h}$, $C \geq 0.02 \text{ mg.ml}^{-1}$. Different analytical methods (X ray diffraction, particle morphology ...) allow to characterise the final product obtained.

For instance, 120mg of chrysolite was treated at 740°C and 25MPa during 6h. The analysis (Figure 2) indicate that there is no more chrysolite and the formation of forsterite and clinoenstatite. A modification of the aspect of the fibers is also observed (Figure 3).

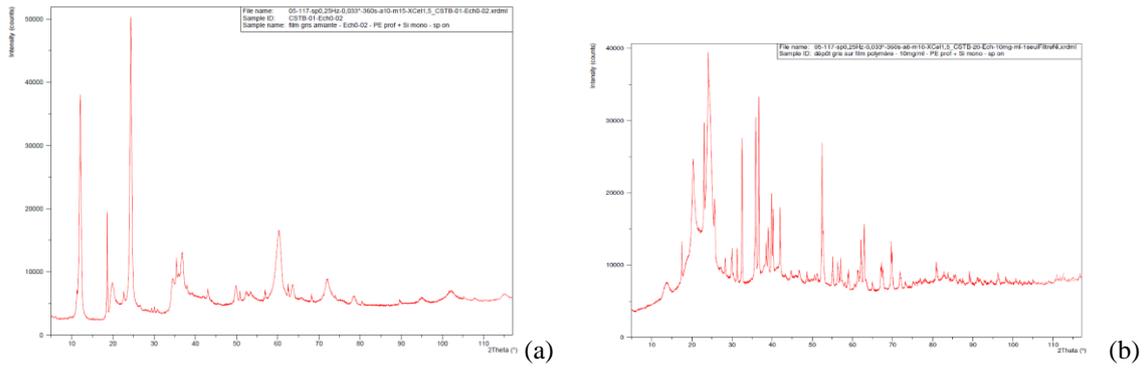


Figure 2. X ray diffraction analysis before (a) and after (b) treatment

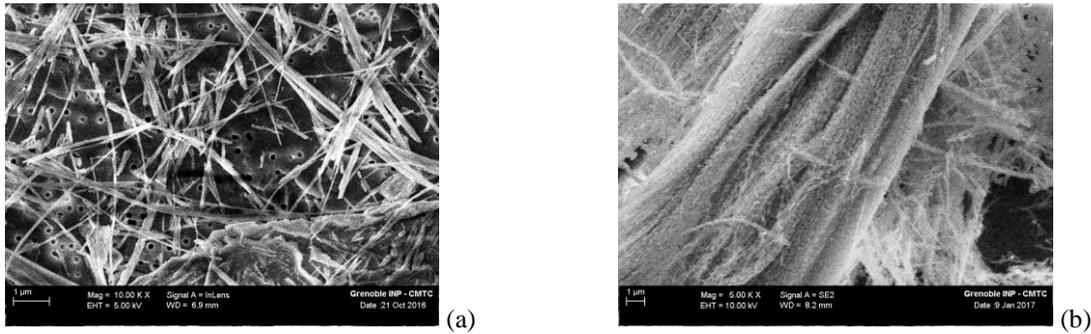


Figure 3. MEB analysis before (a) and after (b) treatment

References

- K. Anastasiadou, D. Axiotis, E. Gidaracos, Hydrothermal conversion of chrysotile asbestos using near supercritical conditions, *Journal of hazardous materials*, 179, pp. 926-932, 2010.
- M.C. Ball, H.F.W Taylor, The dehydration of brucite, *Min. Mag.*, 32, pp.754-762, 1961.
- F. Sigon, A. Servida, S. Grass, Process and plant for the hydrothermal treatment of asbestos and/or asbestos-containing materials in supercritical water, Patent EP1638706 A2, 2006.